


# Balder CinemaScope

The cornerstone of home cinema systems designed to deliver outstanding experiences in the world's finest homes.

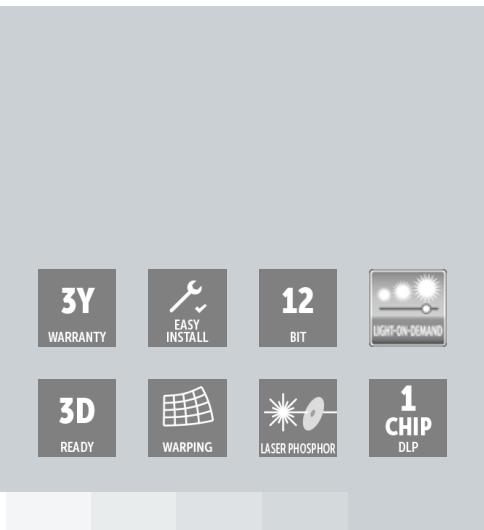

- **Theater & Media Room Series**
- **5K UHD Resolution (5,120 x 2,160)**
- **Laser Phosphor**
- **Up to 5,600 ANSI Lumens**

Balder CinemaScope fuses together the world's finest optical components with the imaging device technology chosen by 8 out of 10 professional cinemas, DLP, our unique PULSE electronics platform and inhouse designed laser engine.

#### Professional grade optics

By basing Balder's cinemascope optical engine on it's bigger brother Loki CinemaScope's architecture, custom designed aspherical glass elements and enhanced low dispersion glass lenses, image quality is in a class of its own. To top that, Balder CinemaScope's frame and core is built in aluminium, 37kg of pure quality. The result is the best picture quality ever shown at this level.

#### State of the art electronics

All new "Pulse" electronics have been designed to process 4K with HDMI 2.0a and HDCP 2.2 and the optical engine is utilising the very latest 0.9" DMD DLP chipset, delivering 5,120 x 2,160 pixels on screen.

#### CinemaScope

The Balder CinemaScope has a unique automatic aspect ratio detection function. It will look for cinemascope content and automatically scale the image to fit the 5,120 x 2,160 resolution and change back to 16:9 (3,840 x 2,160) if you have content in that format. It will also change aspect ratio when a cinemascope format movie has a menu outside the active picture frame. Alternatively, you can switch manually between the different formats.

#### Liquid cooling

Balder CinemaScope has departed from a pure fan based cooling system to a liquid cooling PID regulation system, allowing Balder to operate in any angle.

**PRODUCT SPECIFICATIONS****BALDER CINEMASCOPE**

<b>Projector type</b>	Single chip DLP
<b>Technology</b>	0.9" DMD™
<b>Resolution</b>	5,120 x 2,160 (5K UHD)
<b>Aspect ratio</b>	2.37:1 (CinemaScope)
<b>Light source</b>	Laser phosphor
<b>Light source lifetime</b>	20,000 - 60,000 hours (depending on brightness mode)
<b>Light output</b>	DCI (P3) Color Wheel: Up to 3,600 ANSI lumens T Color Wheel: Up to 4,000 ANSI lumens M Color Wheel: Up to 5,600 ANSI lumens
<b>CLO (constant light output)</b>	Yes
<b>Contrast ratio</b>	1,800:1 Sequential 450:1 ANSI
<b>Brightness uniformity</b>	90%
<b>Lens range</b>	EN68 (0.30:1) EN47 (0.65:1) EN66 (0.80 - 1.21:1) EN63 (1.20 - 1.70:1) EN61 (1.70 - 2.50:1) EN44 (2.50 - 4.60:1)
<b>Optical lens shift</b>	Up to 122% vertical lens shift & up to 36% horizontal lens shift (depending on lens selection) Motorized zoom, focus, iris, shutter and lens shift (depending on lens selection) Visit the Barco Residential Lens Calculator for further information
<b>Optical dowser</b>	Yes
<b>Color correction</b>	P7 RealColor™
<b>Color gamut</b>	DCI (P3) Color Wheel: DCI P3 T Color Wheel: REC.709 M Color Wheel: REC.709
<b>Image processing</b>	Embedded warp, bow correction & blend engine
<b>WARP</b>	Four corner warp
<b>Orientation</b>	360° rotation, no restrictions
<b>Network connection</b>	10/100 Ethernet via RJ45 connection
<b>Integrated web server</b>	Yes
<b>HDR</b>	HDR10
<b>3D</b>	Active stereoscopic 3D* (requires firmware release 1.5 onwards) Additional hardware required please contact an authorized Barco representative for details
<b>Inputs</b>	1 x HDMI 2.0a (HDCP 2.2), 1 x HDBaseT (HDCP 1.4), 2 x dual link DVI-D, 2 x Display Port, HDSDI 1 x RJ45 Ethernet, RS232, 3 x USB, DMX in/out*
<b>Input resolutions</b>	VGA up to 4K UHD (3,840 x 2,160) @ 60Hz Up to 2,560 x 1,600 @ 120Hz
<b>Control</b>	IR, RS232, TCP/IP, 3 x 12v Trigger* (requires firmware release 1.6 onwards) Driver modules available for: Crestron, Control4 and Savant
<b>Power requirements</b>	100 -240V / 50 -60Hz
<b>Power consumption</b>	1,100 W Max.
<b>Noise level (typical at 25°C/77°F)</b>	36 dB(A)
<b>Operating temperature</b>	10 to 45 °C (sea level)
<b>Operational humidity</b>	20 to 80% (relative humidity)
<b>BTU per hour</b>	Max. 4,000 BTU/h

**PRODUCT SPECIFICATIONS****BALDER CINEMASCOPE**

Airflow requirements	Air Inlet (from Rear w/Feet Down): Right Side Exhaust (from Rear w/Feet Down): Rear Clearance Distances (Front / Left / Right / Rear): 1cm / 1cm / 50cm / 100cm
Exhaust airflow	112 ft <sup>3</sup> /min @ 25 °C
Dimensions (WxLxH)	475 x 593 x 286 mm (excluding lens) 18.7 x 23.3 x 11.2 in. (excluding lens)
Weight	37 kg / 81.5 lbs (excluding lens)
Shipping Dimensions	730 x 600 x 480 mm (excluding lens - packaged separately) 28.7 x 23.7 x 18.9 in. (excluding lens - packaged separately)
Shipping weight	43 kg / 94.8 lbs (excluding lens - packaged separately)
Storage temperature	-20 to 60 °C
Storage humidity	10 to 90% (relative humidity)
Standard accessories	Power cord(s), wireless remote control
Certifications	CE, FCC Class A and cCSAus
Warranty	Limited 3 years parts and labor Extendable up to 5 years
*	Firmware upgradable Please contact an authorized Barco representative for details

Last updated: 10 May 2019

Technical specifications are subject to change without prior notice. Please check [www.barco.com](http://www.barco.com) for the latest information.