

SONANCE


DSP AMPLIFIER DATA SHEET

DSP 2-750 MKII MULTI-CHANNEL POWER AMPLIFIER

TECHNICAL SPECIFICATIONS

SKU	93379
UOM	Each
Number of Channels	2 (1 stereo pair)
RMS per Channel @ 8 Ohms	500 watts (2 channels driven)
RMS per Channel @ 4 Ohms	750 watts (2 channels driven)
RMS per Channel Bridged @ 8 Ohms	2,000 watts
Frequency Response	5Hz-50kHz
Distortion (1kHz) @ 8 Ohms	0.4%
Distortion (1kHz) @ 4 Ohms	0.3%
AC Voltage	100-120V@60Hz, 220-240V@50Hz
AC Fuse	15A (T15AL - 250V)
Dimensions + Feet (WxHxD)	17.25" x 3.875" x 17.219" (438mm x 98mm x 437mm)
Dimensions + Rack Ears, No Feet (WxHxD)	19" x 3.5" x 17.219" (482mm x 88mm x 437mm)
Rack Space Requirement	2U
Shipping Weight	23.3 lbs. (10.6kg)

DIMENSIONAL DRAWINGS

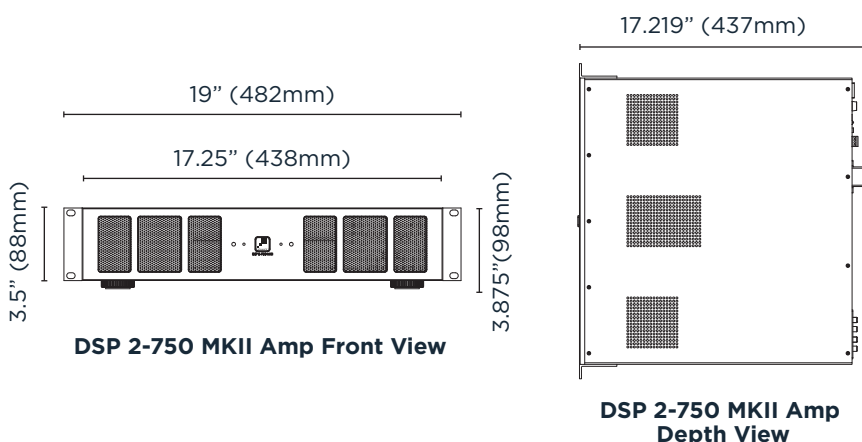

OPTIONAL ACCESSORIES

MODULES

Digital Input Module (DIM)	93099
Hybrid Input Module (HIM)	93361

ASSOCIATED PRODUCTS

SONAMP DIGITAL AMPLIFIERS

2-100	93091
12-50	93092

LIMITED TWO (2) YEAR WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2021 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 • www.sonance.com • 03.17.2021